
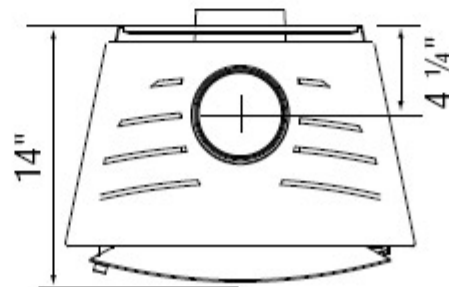
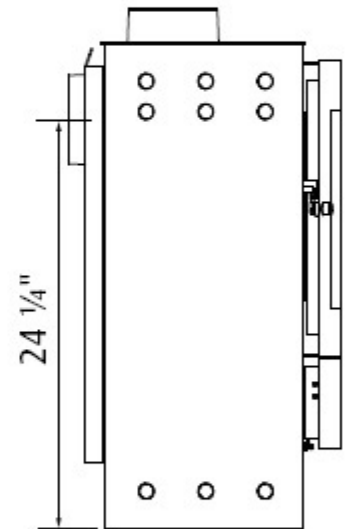


R25

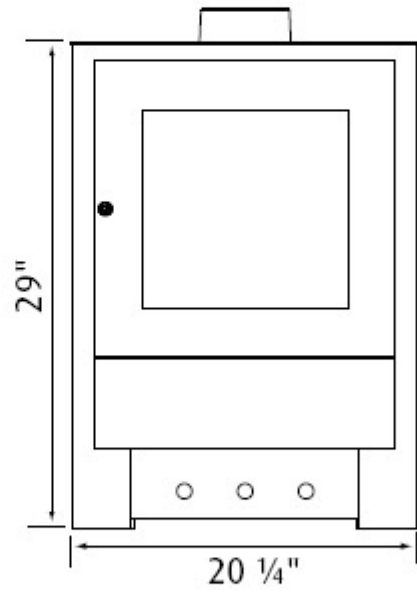

Technical information:

Fuel type	Natural gas or propane	
Input range, natural gas (BTU)	Max 30,000	Min 22,000
Input range, lpg (BTU)	Max 29,000	Min 21,000
Max output, natural gas (BTU)	Max 21,900	
Max output, lpg (BTU)	Max 21,200	
Venting type	Direct vent	
Flue size	6 ⁵ / ₈ ''	
Shipping weight	156 lbs	
Clearances	front: 60'' sides: 6'' top: 36'' back: 6'' floor: combustible	
Heating capacity	Up to 1,000 sq ft	
Listing	ANSI Z.21.88 / CSA 2.33	
Approved for bedroom and mobile home installation		

Standard Features:

Heavy steel body

Patented 100% ceramic burner

Ceramic log set

Remote control

Mertik Maxitrol GV60 valve

Automatic ignition system

Field conversion kit LP or NG

Top or rear flue connection

Compatible with DuraVent flue pipe

Long life cast iron heat deflector

Working door for easy maintenance

Cast-iron inner door with steel fascia

Door Color Options:

Graphite & Alummat Silver

